


# TORNADO®

## T15/155/15 WILD BOAR FENCE

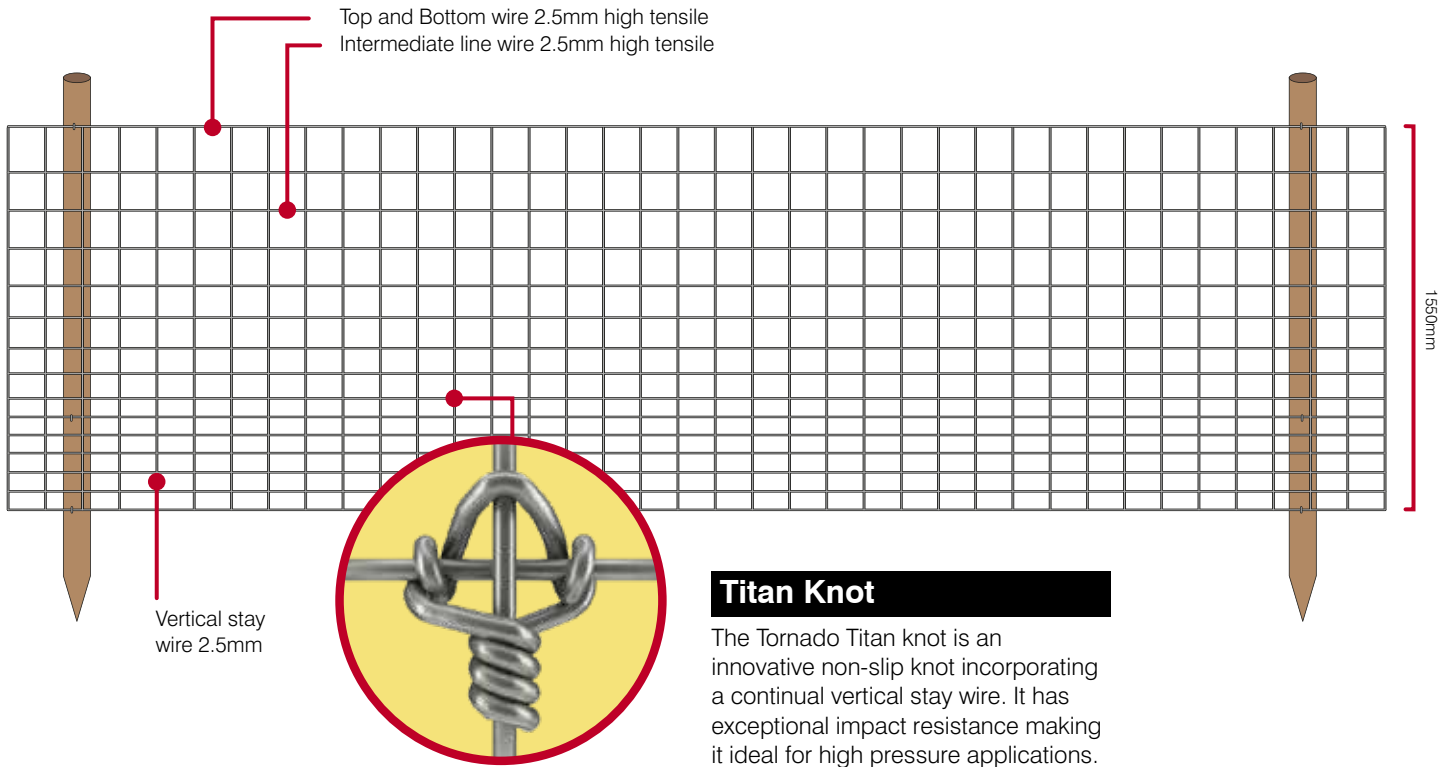

### Titan Knot

The Tornado Titan knot is an innovative non-slip knot incorporating a continual vertical stay wire. It has exceptional impact resistance making it ideal for high pressure applications.

### Description

T15/155/15 is used to prevent wild boar from crossing runways, roads, railways and other thoroughfares. The Titan knot helps create a highly visible barrier, with solid vertical wires for increased net strength. Tornado Titan Deer Fence is manufactured with high tensile wire which strains tighter than mild steel and so requires fewer intermediate posts, making it quicker to erect. The spring like properties of a high tensile wire help the netting stay tight, keeping maintenance to a minimum.

### Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating. Plain wire or electrified wire can be added to the top of the fence if required. For more information on installation please refer to BS1722 part 2

### Suitable For

Wild Boar

### Specification

Number of line wires	15
Overall height	155cm
Distance between stay wires	15cm
Top & bottom line wire specification	2.5mm diameter - 1235 - 1390 N/mm <sup>2</sup>
Intermediate line wire specification	2.5mm diameter - 1235 - 1390 N/mm <sup>2</sup>
Vertical stay wire specification	2.5mm diameter - 695 - 850 N/mm <sup>2</sup>
Approx. weight per 100m roll	128kg
Material composition	Heavily galvanised steel wire

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

**TORNADO®**  
Latest update: 01/12/21

sales@tornadowire.com  
Tel: +44 (0) 1789 778 766



# TORNADO®

## T15/155/15 WILD BOAR FENCE

### British & European Standards

- BSEN 10218** Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.
- BSEN 10223** Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.
- BSEN 10244** Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).
- BS EN ISO9001** Tornado Wire Ltd operates a quality management system certified to this standard.

### Sustainability

All Tornado products are 100% recyclable.

### Traceability


This fence is batch marked and can be traced back to point of manufacture.

### Health & Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

### Product Codes

100m roll TZST151501

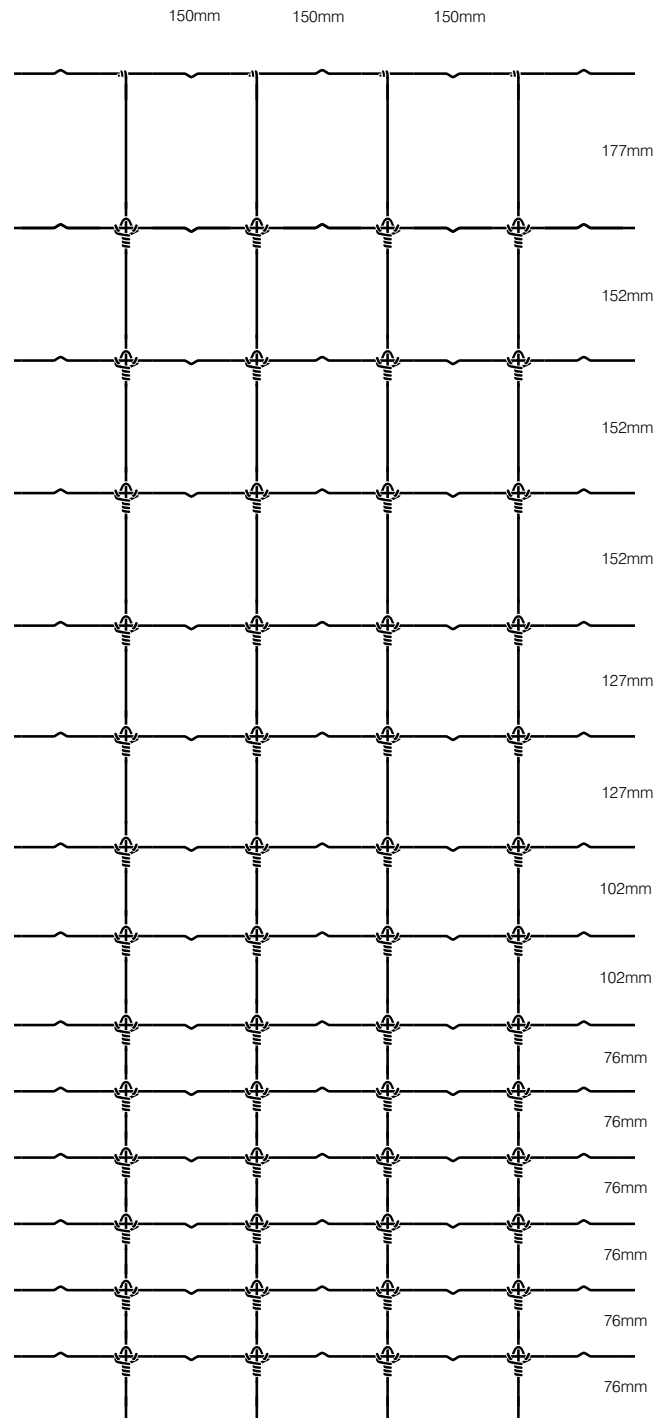

Tornado Wire Limited, Bidford-on-Avon, Alcester, Warwickshire, B50 4JH. Tel: +44 (0) 01789 778 766 | [www.tornadowire.com](http://www.tornadowire.com) | email: [sales@tornadowire.com](mailto:sales@tornadowire.com)

**TORNADO®**  
Latest update: 01/12/21

[sales@tornadowire.com](mailto:sales@tornadowire.com)  
Tel: +44 (0) 1789 778 766

