


TORNADO®

L8/80/15 STOCK FENCE

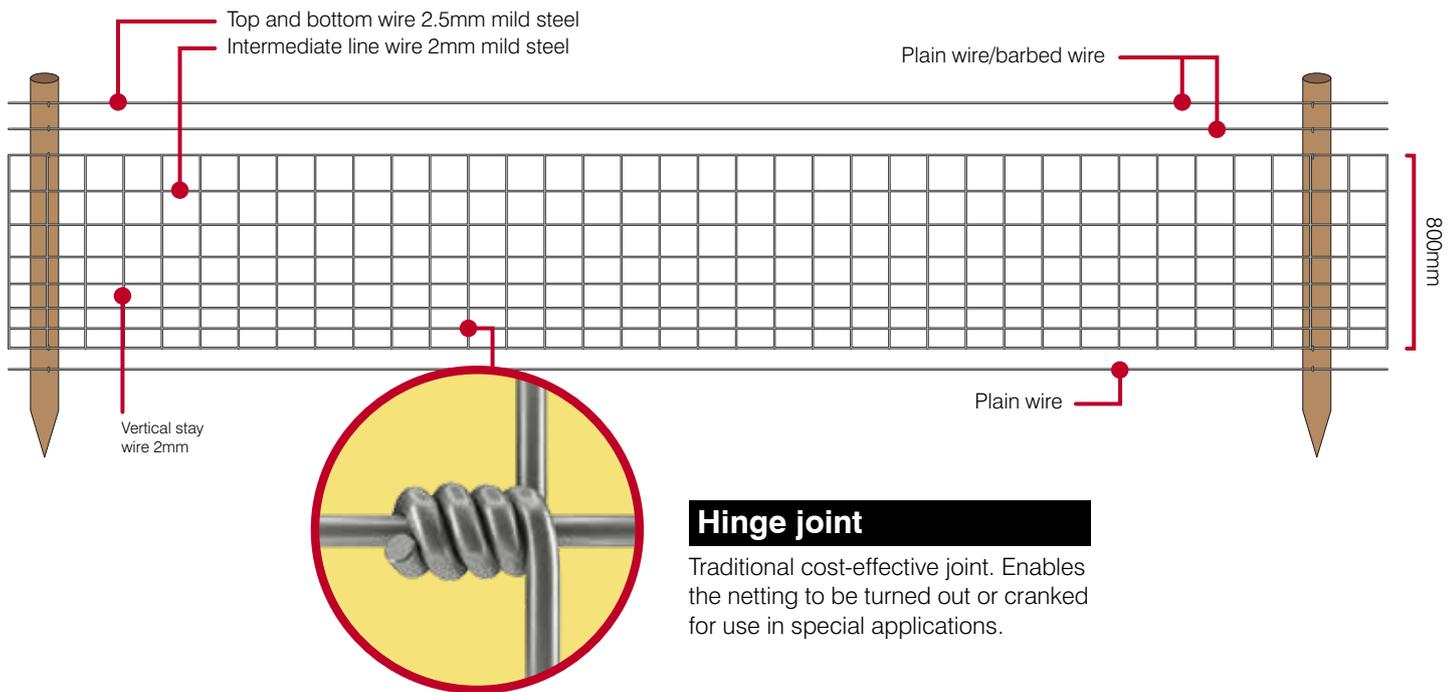

Hinge joint

Traditional cost-effective joint. Enables the netting to be turned out or cranked for use in special applications.

Description

L8/80/15 is a lightweight, mild steel stock fence, ideal for saving money when used in areas of low pressure from livestock or for a short term project. Mild steel does not need to be strained as tightly as the high tensile variant and gradual turns can be made using intermediate posts. This is particularly useful if you need to make a lot of turns in your fence.

Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the net should be pulled tight but not over tensioned. Avoid driving staples tight against the wire as this will damage the galvanised coating. Two strands of barbed wire or a single electrified wire can be added to the top of the fence. For more information on installation please refer to BS1722 part 2.

Suitable For

Cattle

Sheep

Specification

Number of line wires	8
Overall height	80cm
Distance between stay wires	15cm
Top & bottom line wire specification	2.5mm diameter - 695 - 850 N/mm ²
Intermediate line wire specification	2mm diameter - 695 - 850 N/mm ²
Vertical stay wire specification	2mm diameter - 695 - 850 N/mm ²
Approx. weight per 50m roll	21kg
Material composition	Heavily galvanised steel wire

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

TORNADO®

Latest update: 01/12/21

sales@tornadowire.com

Tel: +44 (0) 1789 778 766



TORNADO®

L8/80/15 STOCK FENCE

British & European Standards

- BS EN 10218** Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.
- BS EN 10223** Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.
- BS EN 10244** Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).
- BS EN ISO9001** Tornado Wire Ltd operates a quality management system certified to this standard.

Sustainability

All Tornado products are 100% recyclable.

Traceability

This fence is batch marked and can be traced back to point of manufacture.


Health & Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

Product Codes

50m roll	MZLG088001
100m roll*	MZLG088002

*Minimum order quantity may apply.

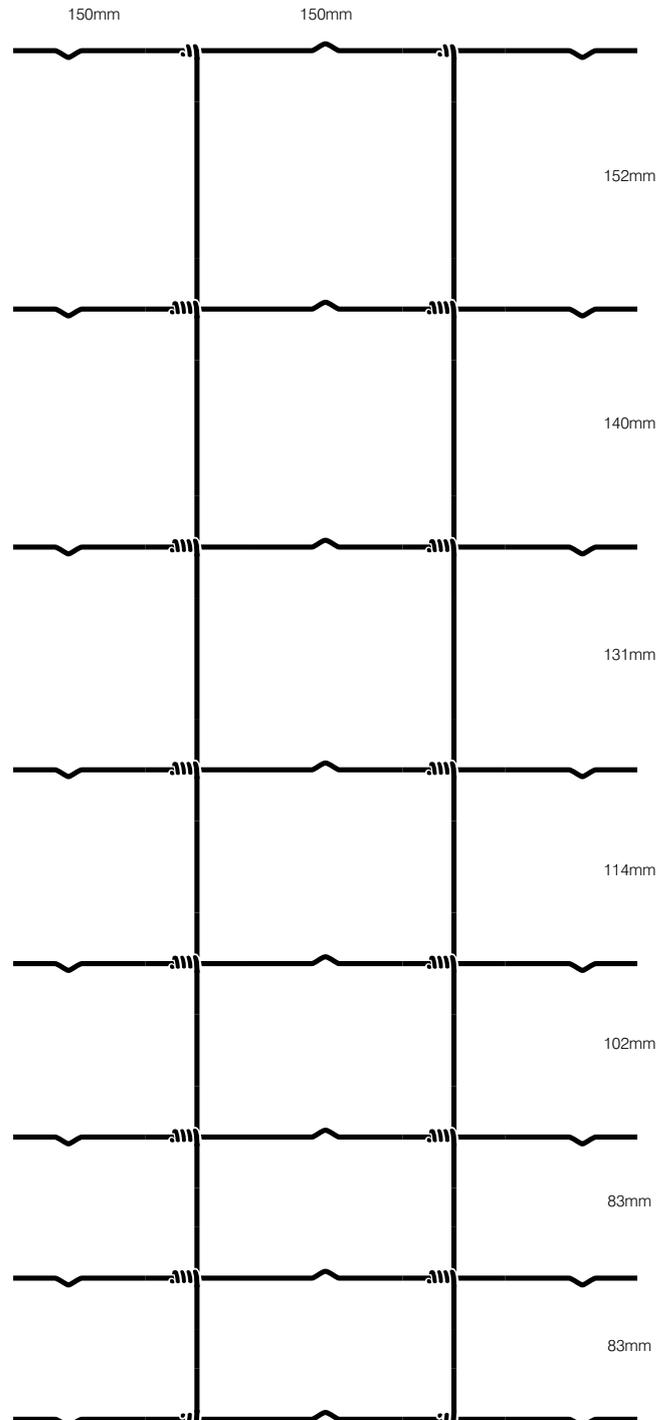

Tornado Wire Limited, Bidford-on-Avon, Alcester, Warwickshire, B50 4JH. Tel: +44 (0) 01789 778 766 | www.tornadowire.com | email: sales@tornadowire.com

TORNADO®
Latest update: 01/12/21

sales@tornadowire.com
Tel: +44 (0) 1789 778 766

