


TORNADO®

1050 X 31 X 1MM BUDGET HEX NET

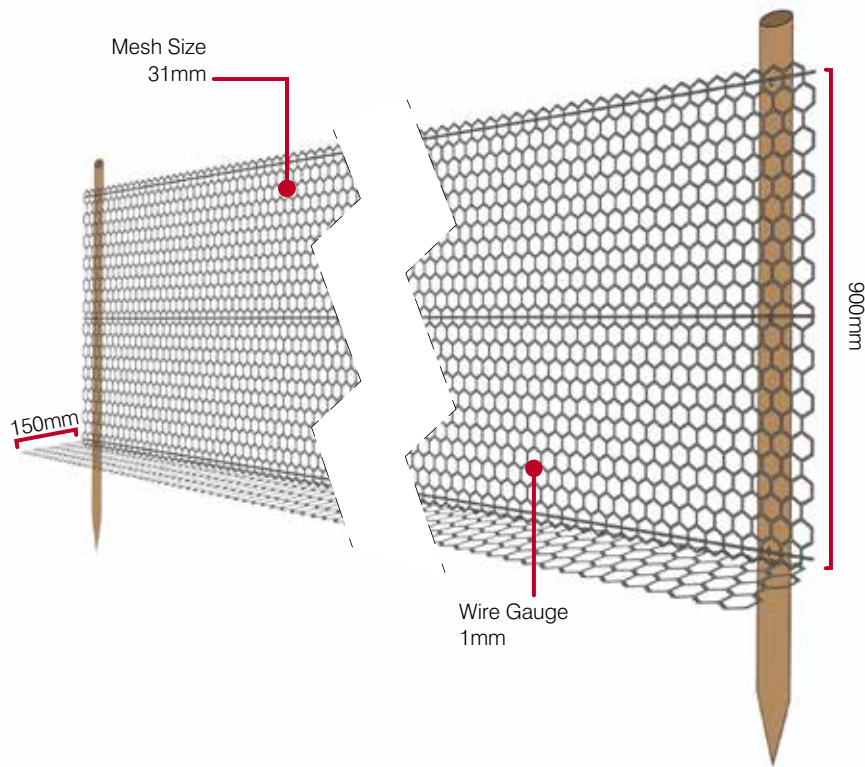

Description

1050 x 31 x 1mm Budget Hex Net is our most popular rabbit netting, offering a cost effective solution to rabbit control. Integrated salvage wires provide additional strength, and the net can be turned out if required to prevent burrowing underneath. We would always recommend using Tornado Premium rabbit netting; however, we understand that sometimes a fence is only required for a short period of time. Although still heavily galvanised, this netting is not recommended for grant work.

Installation Guidelines

Rabbit netting should be supported by three line wires positioned at the top, middle and bottom of the net. The wires should be either 2.5mm or 3.15mm High Tensile. They should be tied off and joined using suitable joiners before being tensioned between the straining posts. A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. The bottom 150mm of the netting can be turned out to help prevent the rabbit burrowing under the fence. Zinc and zinc aluminium coated agricultural fence service life can be affected significantly when exposed to extremely acidic / alkaline or saline environments and this factor should be considered when designing your fence installation. For typical service life to be achieved it is recommended that the product must be installed in an atmosphere with corrosion class C1, C2 or C3 (very low/low/ medium) in accordance with ISO 9223 and

must not come into contact with substances that will accelerate corrosion, including but not limited to fertilisers, pesticides, herbicides, salt water and soils of pH lower than 5.5. Particularly at sites with peaty and wet ground conditions it is recommended that you have the soil pH tested prior to designing your installation. When all three strands of wire have been installed the rabbit netting can be rolled out, stretched slightly by hand and clipped to the line wires approximately every metre using suitable clips. For more information on installation please refer to BS1722 part 2.

Suitable For

Rabbits

Specification

Wire Gauge (mm)	1
Overall Height (mm)	1050
Mesh Size (mm)	31
Approx. weight per 50m roll	22kg
Material Composition	Heavily galvanised steel wire

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

TORNADO®

Latest update: 01/12/21

sales@tornadowire.com

Tel: +44 (0) 1789 778 766



TORNADO®

1050 X 31 X 1MM BUDGET HEX NET

British & European Standards

- BSEN 10218** Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.
- BSEN 10223** Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.
- BSEN 10244** Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).
- BS EN ISO9001** Tornado Wire Ltd operates a quality management system certified to this standard.

Sustainability

All Tornado products are 100% recyclable.

Traceability

This fence is batch marked and can be traced back to point of manufacture.


Health & Safety

It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

Product Codes

50m roll HXTE301005

Wire Gauge (mm) - 1

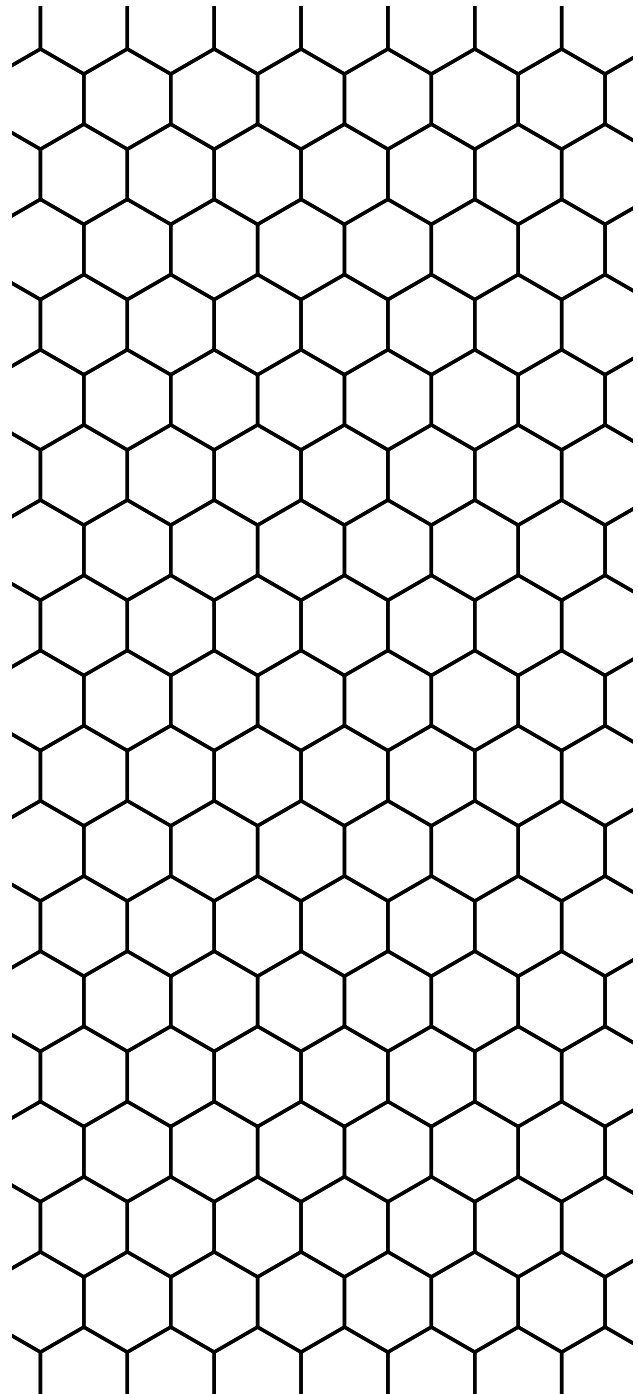

Mesh Size (mm) - 31

Tornado Wire Limited, Bidford-on-Avon, Alcester, Warwickshire, B50 4JH. Tel: +44 (0) 01789 778 766 | www.tornadowire.com | email: sales@tornadowire.com

TORNADO®
Latest update: 01/12/21

sales@tornadowire.com
Tel: +44 (0) 1789 778 766

