


TORNADO®

R13/192/8

CLIPLEX DOG EXERCISE FIELD

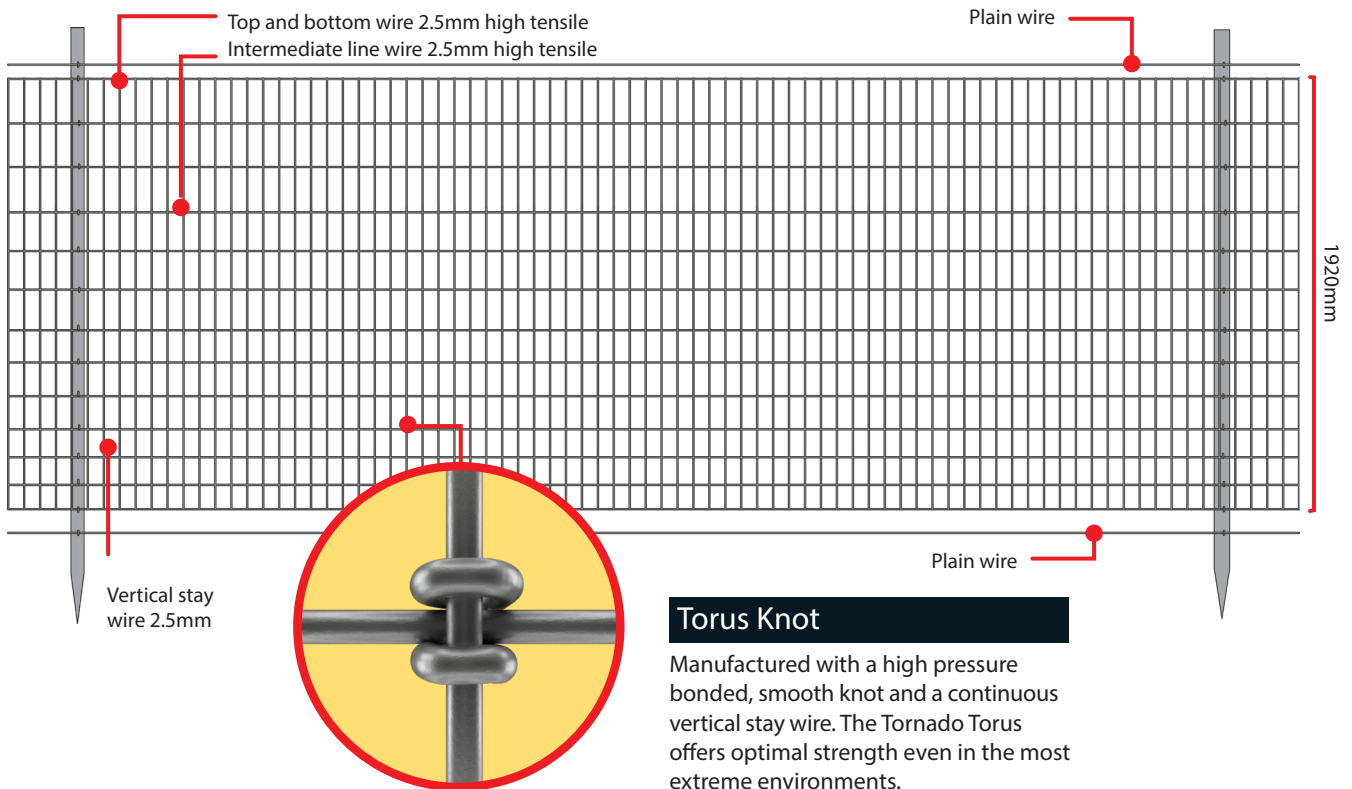

Torus Knot

Manufactured with a high pressure bonded, smooth knot and a continuous vertical stay wire. The Tornado Torus offers optimal strength even in the most extreme environments.

Description

R13/192/8 is a full height one-piece protection net which helps keep dogs safe and secure. Pair with the Tornado Clipex posts and Pro-Strain metal straining system, as recommended by British Dog Fields for a complete metal fence system. Solid vertical wires add strength and rigidity to the net. The unobtrusive high pressure bonded Torus knot provides a pleasing aesthetic favoured by planners. R13/192/8 is manufactured with high tensile wire which strains tighter than mild steel and so requires fewer intermediate posts, making it quicker to erect. The spring like properties of a high tensile wire help the netting stay tight, keeping maintenance to a minimum.

Installation Guidelines

A straining post is required at every major change in direction or any termination and should be supported by a strut or box assembly. Netting should be tied off on the straining posts by hand or with suitable joiners. When tensioning the fence the 'crimp' in the net should be reduced by approx: 50%. Avoid driving staples tight against the wire as this will damage the galvanised coating. A single strand of barbed or electrified wire can be added to the top of the fence for additional security. For more information on installation please refer to BS1722 part 2.

Suitable For

Dog Exercise Field

Specification

Number of line wires	13
Overall height	192cm
Distance between stay wires	8cm
Top & bottom line wire specification	2.5mm diameter - 1235 - 1390 N/mm ²
Intermediate line wire specification	2.5mm diameter - 1235 - 1390 N/mm ²
Vertical stay wire specification	2.5mm diameter - 695 - 850 N/mm ²
Approx. weight per 50m roll	83kg
Material composition	Heavily galvanised steel wire

All measurements are approximate. It is the user's responsibility to check the product is suitable for the application. We reserve the right to change specifications without notification.

TORNADO®
Latest update: 18/11/24

sales@tornadowire.com
Tel: +44 (0) 1789 778 766



TORNADO®

R13/192/8

CLIPEX DOG EXERCISE FIELD

British & European Standards

- BS EN 10218 Steel Wire and Wire Products part 2 - General Wire Dimensions and Tolerances.
- BS EN 10223 Steel Wire and Wire Products for Fencing and Netting part 5 - Steel Wire Woven Hinged Joint and Knotted Mesh Fencing.
- BS EN 10244 Steel Wire and Wire Products Non-ferrous Metallic Coatings on Steel Wire part 2 - Zinc or Zinc Alloy Coatings (all Tornado products galvanised to class A).
- BS EN ISO9001 Tornado Wire Ltd operates a quality management system certified to this standard.

Sustainability

All Tornado products are 100% recyclable.

Traceability

This fence is batch marked and can be traced back to point of manufacture.

Health & Safety


It is recommended that safety gloves, boots and glasses are worn at all times when handling the product.

Product Codes

50m roll	RZST131901
100m roll*	RZST131910
200m roll*	RZST131911

*Minimum order quantity may apply.

80mm 80mm 80mm 80mm 80mm 80mm 80mm 80mm 80mm

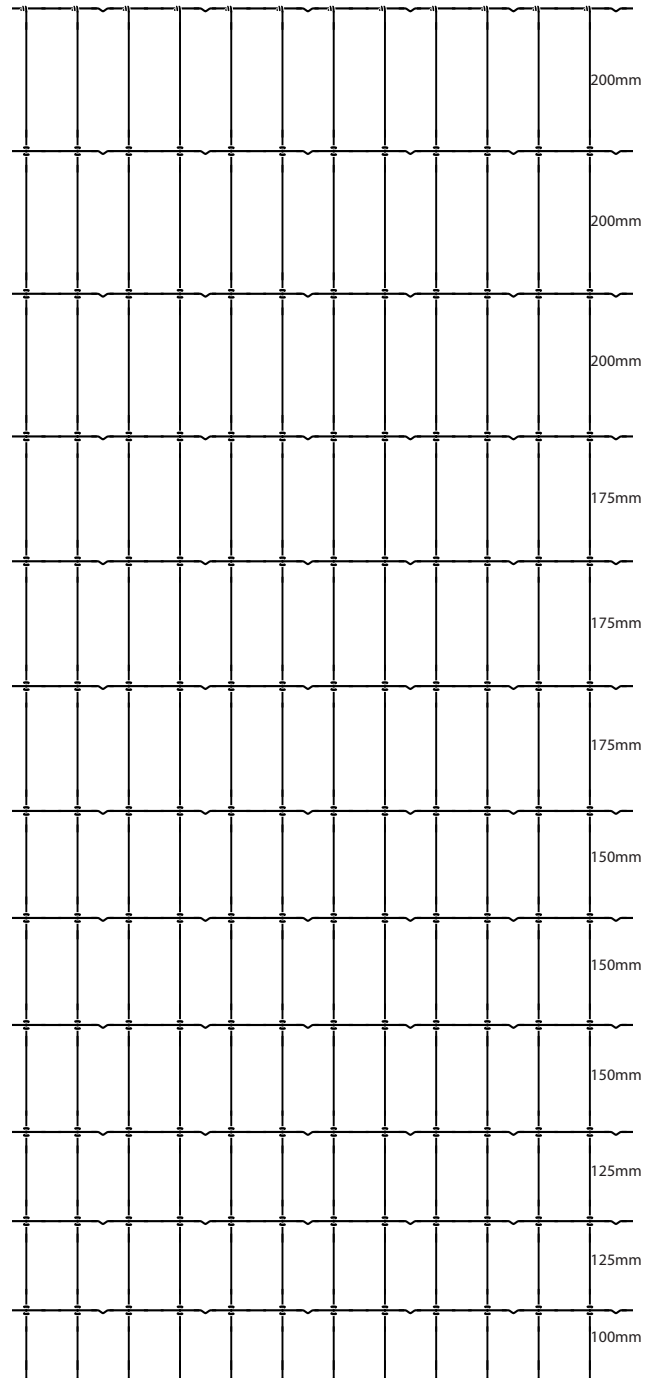

Tornado Wire Limited, Bidford-on-Avon, Alcester, Warwickshire, B50 4JH. Tel: +44 (0) 1789 778 766 | www.tornadowire.com | email: sales@tornadowire.com

TORNADO®
Latest update: 18/11/24

sales@tornadowire.com
Tel: +44 (0) 1789 778 766

